



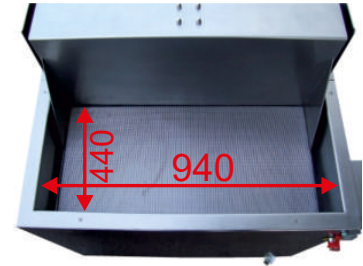

SHRINK TANKS MI (MANUAL IMMERSION)

OPERATION: The product is manually placed and submerged during the scheduled time when you press the start button.

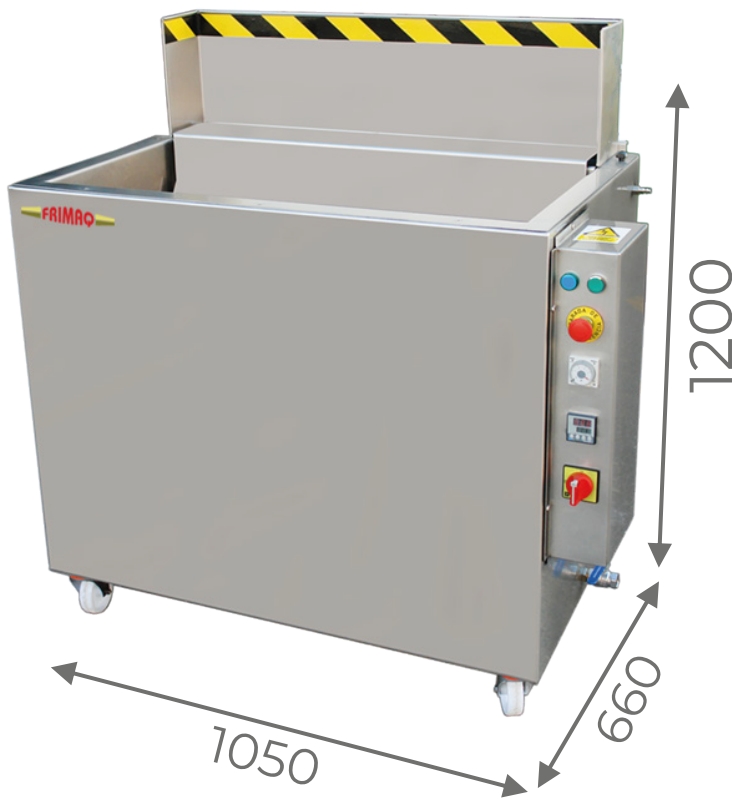



MANUAL IMMERSION

-It shrinks the products by immersion in hot water

-It heats by:

Option 1
electrical heaters option

Option 2
steam option

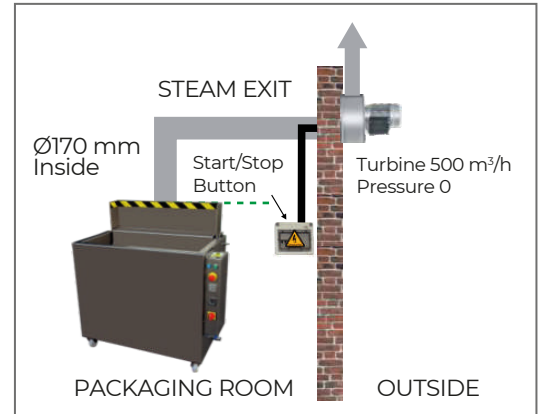

OPTION

STEAM HEATING VERSION

STEAM

- Minimal diameter of the inlet pipe 3/4"
- Working pressure 3-8 Bars
- Consumption 50-90 Kg/h



ELECTRICITY

- Voltage 400V
- 3P Phases+N+Earth
- Frequency 50/60 Hz
- Maximum power: 1 kW



OPTION

ELECTRICITY HEATING VERSION

ELECTRICITY

- Voltage 400V
- 3P Phases+N+Earth
- Frequency 50/60 Hz
- Maximal power 15 Kw



4 x heaters of 3.750 W
Approx. consumption of 25 A

WATER	COMPRESSED AIR	WEIGHT	INTERIOR DIMENSIONS
Working pressure 2-6 Bars	Pressure 4-8 Bars Consumption 50L/minute	200 Kg approx.	930x440 mm (Immersion height from 250 to 300 mm)

GENERAL FEATURES

- Built in stainless steel. AISI 304.
- CE Certification.

- Adjustable immersion time.
- Water tank from 100 to 120 litres.

- Wheels for an easy portability.