

# TRAYSEALER MODEL MINI 2

## SEALING




## VACUUM



## GAS-MAP



## MOULD 1/2 GN



## MOULD 1/4 GN





## MOULD 1/8 GN




## OPTION SILENT COMPRESSOR




## OPTION: OXYGEN PUMP



## OPTION: UPWINDER






## STANDARD



## OPTION

## CUTTING BLADE MEASURES

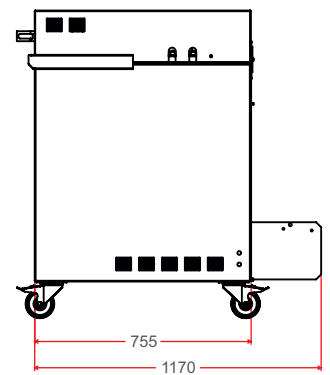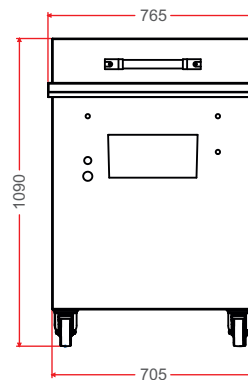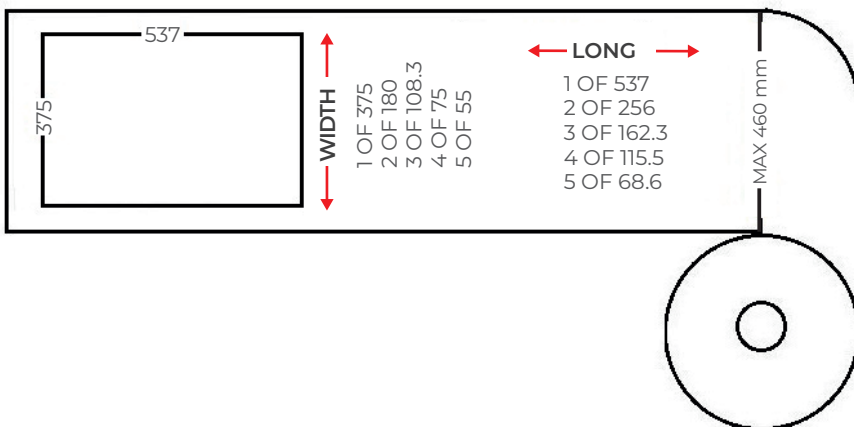

## FEATURES:

- Structure in stainless steel AISI 304.
- Touchscreen with 25 programs to be accommodated to different products.
- Vacuum by millibars and time, or both.
- Gas injection millibars and time over gas.
- Temperature control probe.
- Manual lowering of the hood.
- Vacuum pump 25 m<sup>3</sup>/h.
- Capacity for 11GN tray.

- Capacity for 2 1/2 GN trays.
- Capacity for 4 trays 1/4 GN.
- Capacity for 6 trays 1/6 GN.
- Capacity for 8 trays 1/8 GN.
- Or the model chosen by the customer.
- Film width 430 mm.
- Cutting of the trays independently.
- Three phases 380v. 3P+N+T.
- Power 5000 W.

- Approx. performance 80 cycles/h. (Including loading and unloading time).
- **Connected to the compressed air network.**
- **Compressed air consumption: 290 liters/minute/6 bars of pressure.**