




SHRINK TANKS ACA 900 (AUTOMATIC CONTINUOUS SPRINKLER)

OPERATION: The product automatically enters and makes a continuous shrink process without stops.

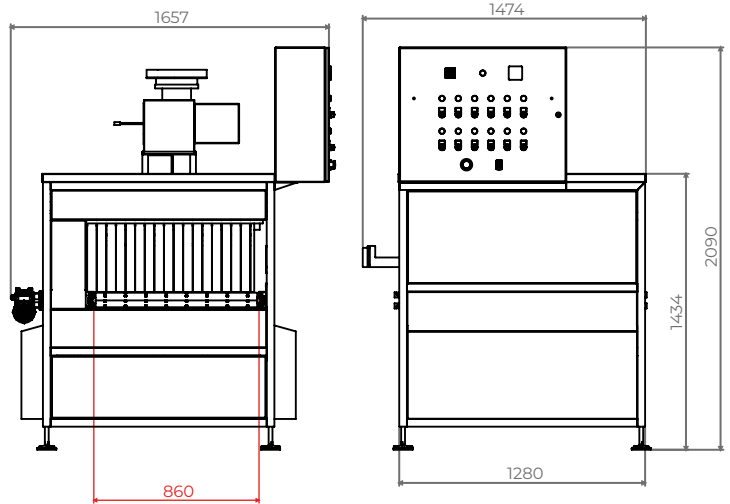

AUTOMATIC CONTINUOUS SPRINKLER

-It shrinks the products by hot water sprinkler.



-It heats by:

OPTION 1

-electrical heaters

OPTION 2

-steam option

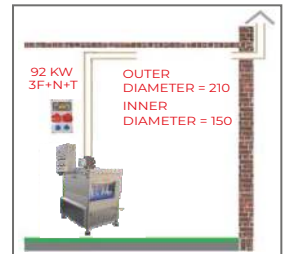

OPTION 1:

STEAM HEATING VERSION

STEAM

- Minimum diameter of the inlet pipe 3/4"
- Working pressure 3-8 Bars
- Consumption 70-120 Kg/h



ELECTRICITY

- Voltage 400 V
- 3P Phases+N+Earth
- Frequency 50/60 Hz
- Maximum power: 4 Kw



COMPRESSED AIR

- Pressure 4-8 Bars
- Consumption 50



OPTION 2:

HEATING VERSION BY ELECTRICAL HEATERS

ELECTRICITY

- Voltage 400 V
- 3P Phases+N+Earth
- Frequency 50/60 Hz
- Maximum power ACA 900-90 kw
- Heaters of 10 kw



WATER

Work pressure 2-6 Bar

WEIGHT

From 500 to 600 Kg depends on model

GENERAL FEATURES

- Built in stainless steel. AISI 304.
- CE Certification.
- Electrical panel to be hung on the wall or in the tank itself.
- Motorized belt.
- Shrink process controlled by the belt speed.